

# SYSTEM FEEDER



## SF100-SS



- Adjustable pressure set point between 5-50 psi
- Internal components are corrosion resistant
- 60 USG reservoir tank stores (227) liter of fluid
- No direct connection to potable water supply eliminates need for backflow prevention
- Feeders are compatible with both water and glycol/water solution
- Translucent reservoir provides notice that system may have developed a leak and mitigates potential for flooding disaster
- Diverter valve allows easy purging of air on initial start-up and manual mixing of fluid in the tank
- Fluid drained for service from the system can easily be recovered to the tank
- Fluid level switch shuts pump off if the storage tank level gets too low
- All units plug into any standard 115 VAC outlet

5-50 Psi  
(60 USG)



Certified to CAN/CSA  
C22.2 No. 68

**Intertek**  
9901055

Conforms to  
UL 73

Axiom System Feeders are designed to simplify the process of maintaining the cold static fluid pressure in closed-loop heating and cooling systems. Having a reservoir of suitable make-up fluid eliminates the need for backflow prevention and helps solve many of the associated problems when using domestic water as a make-up fluid.

✉ info@axiomind.com

☎ (877)651-1815

🌐 WWW.AXIOMIND.COM

**PressurePal**



## SF100-SS HYDRONIC SYSTEM FEEDER TECHNICAL INFORMATION

### **DIMENSIONS :**

**WEIGHT :** 27.2 kg, 60 lbs (Empty)


### **PUMP ELECTRICAL :**

115/60/1, 0.7 amps  
3-prong plug and cord

### **PUMP PERFORMANCE :**

0.09 l/s (1.4 gpm) @ free flow  
0.06 l/s (1.0 gpm) @ 345 kPa (50 psig)  
Self-priming up to 2.1 m (7 feet)  
Maximum liquid temp. 77 C (170 F)

**Not for use with flammable liquids**

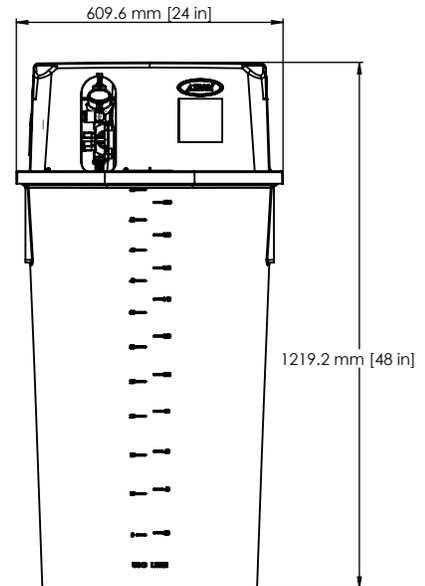

**MIXING & STORAGE TANK  
60 USG (227 LITRES)**



Certified to CAN/CSA  
C22.2 No. 68

**Intertek**  
9901055

Conforms to  
UL 73

### **SPECIFICATION :**

Hydronic system feeder shall be AXIOM INDUSTRIES LTD. Model SF100-SS. System shall include 227 litre (60 US gallon) storage/mixing tank with cover; pump suction hose with inlet strainer; pressure pump with thermal cut-out; integral pressure switch; integral check valve; cord and plug; pre-charged S.S. accumulator tank; S.S. manual diverter valve for purging air and agitating contents of storage tank; S.S. pressure regulating valve adjustable (35 – 345 KPa; 5 – 50 psig) complete with S.S. pressure gauge; built-in check valve; S.S. union connection; low level pump cut-out. All wetted parts made from corrosive resistant material and are compatible with brine solution. Pressure pump shall be capable of running dry without damage. Power supply 115/60/1 0.7 A. Unit shall be completely pre-assembled.

### **OPTIONAL ACCESSORIES :**

- RIA10-1-SAA** -- Low level Alarm Panel c/w Remote Monitoring Dry Contacts and Selectable Audible Alarm
- SF100-2240** -- 454 litre (120 US gallon) containment tank

### **LIMITED WARRANTY :**

The SF100-SS is warranted against defects in materials and workmanship for one year.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent