



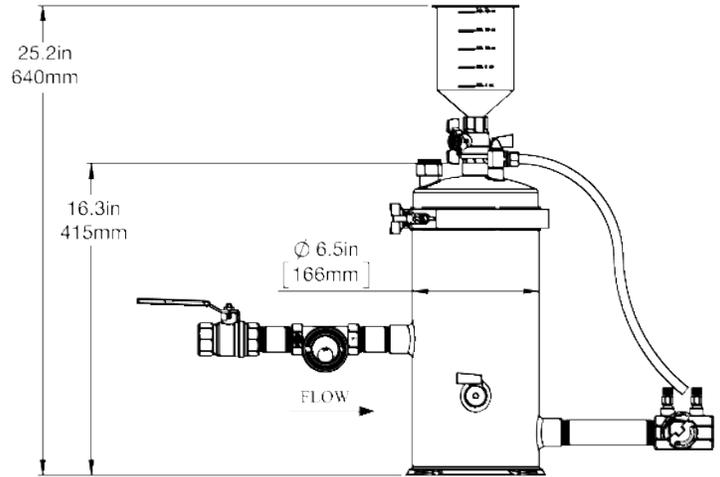

MULTI CARTRIDGE SIDE STREAM FILTERPAK TECHNICAL INFORMATION

DIMENSIONS:

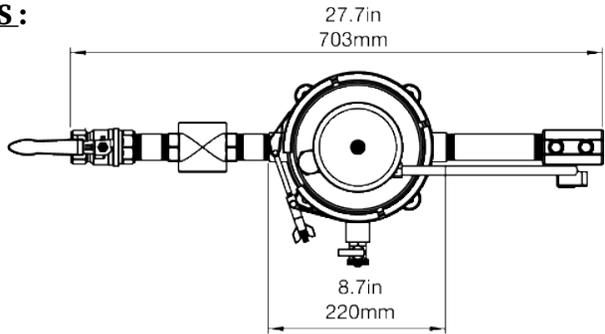

WEIGHT: 9.98 kg, 22 lbs

PARTS:

SFP-10-5M: 5 micron cartridge replacement.

SFP-10-10M: 10 micron cartridge replacement.

SFP-10-25M: 25 micron cartridge replacement.

SFP-10-MCF3-0800: EPDM O-Ring + Hardware kit

	Model	Size	Side Stream Flow Rate	Filter Size	Vessel Volume
<input type="checkbox"/>	SFP-10-MCF3	1"	24 gpm (91 lpm)	10" (254mm) DOE cotton wound	1.6 gal (6.05L)

SPECIFICATION:

Hydronic Filter Package shall be AXIOM INDUSTRIES LTD. model SFP-10-MCF3. System shall include three filters, sight flow indicator, four ball valves, balancing valve, one magnetic well, four nipples, funnel, and hose. Filter housing shall be constructed of 304 stainless steel with 304 stainless steel head and shall include a brass drain valve with 3/4" male garden hose thread (GHT) and cap. Filter cartridges shall be a 25 micron, 10" long, cotton wound cartridge with tin core (5 and 10 micron replacement cartridges available separately). Sight flow indicator shall be brass body with 1" FNPT connections, two tempered borosilicate glass windows, 304 stainless steel cage, TPX ball, and cork washers (non-wetted part). Ball valves shall include: one 3/4" FNPT x MNPT brass ball valve, one 1" FNPT x FNPT brass ball valve, and one 90-degree brass ball valve with 1/4" MNPT x 3/8" compression. Manual balancing valve shall be brass construction, 1" FNPT x FNPT, and shall include integral air vent, memory stop, and shall provide flow metering, balancing, and filter isolation. Magnetic well shall be 1/2" MNPT with magnetic particle 12,000 Gauss capture. Nipples shall include two 1" MNPT x 1" MNPT brass nipple, 3" length and one 1" MNPT x 1" MNPT, 6" length. Additional fittings include a 20oz plastic funnel with 3/4" MNPT connection. Polyethylene hose shall be 3/8" OD, 16" length for air purge valve connection. The SFP-10-MCF3 series is not for potable water.

LIMITED WARRANTY:

The Axiom SFP Multi Cartridge Side Stream FilterPak is warranted against defects in materials and workmanship for one year.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent