

Side Stream Filter



ASFI-100 (Sight Flow Indicator)

- Ⓐ 1" FNPT Connection
- Ⓐ Provide quick visual identification of flow
- Ⓐ Helps identify, if a filter cartridge requires replacement
- Ⓐ Mounts in any orientation
- Ⓐ Buoyant TPX ball movement can be seen at flow rates less than 1 GPM
- Ⓐ Each sight flow indicator is inspected and pressure tested
- Ⓐ Rebuild kits are available

1" FNPT Connection
125 Psi (860 kPa) at 200°F (93°C)

MATERIAL

Body	Brass (JIS YBSC3)
O-Ring	EPDM
Window	Tempered borosilicate glass
Cage	S.S. 304
Ball	TPX
Washer	Cork (non-wetted part)






ASFI-100 SIGHT FLOW INDICATOR TECHNICAL INFORMATION

DIMENSIONS :

Size	Part #	Max. pressure	A	B	C	D
1"	ASFI-100	125psi (860kPa)	3.6" [92mm]	2.5" [63mm]	2.6" [67mm]	2" [51mm]

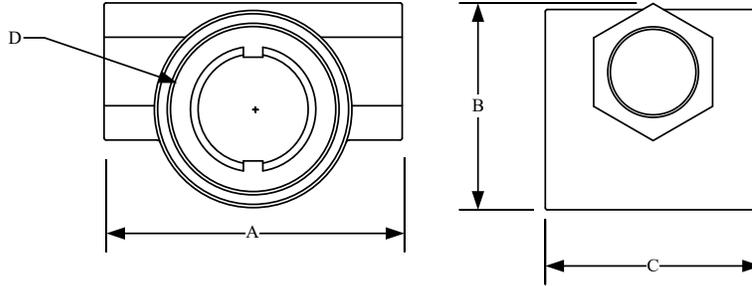

WEIGHT: 1.36 kg 3 lbs

SPECIFICATION :

Max temperature	200°F (93°C)
Max pressure	125psi (860kPa)
Connection	Threaded FNPT size 1"
Compatible fluids	Water, propylene and ethylene glycol, methanol and ethanol in concentrations up to 50%. Not for potable water.

OPTIONAL ACCESSORIES :

- ASFI-K** -- Sight Flow Rebuild Kit includes: 2 glass windows, 2 O-rings, and 2 cork gaskets.
- ASFI-Tool** -- Opening Tool.

LIMITED WARRANTY :

The Axiom (ASFI) sight flow indicator is warranted against defects in materials and workmanship for one year.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent