

# Condensate Neutralizer

AXIOM

## NT70



- 1 ½" NPT connections
- Drain valve included to accommodate servicing/flushing media
- Up to (3) NT70 can be piped in parallel for larger applications
- 72 liter (19.4 USG) tank with designed to channel flow through LipHter media for complete neutralization
- Optional high level float to connect to alarm system
- Neutralized condensate is more environmentally friendly
- All materials made from corrosion resistant material
- Includes initial charge of Axiom's LipHter neutralizing media

Featuring :

**LipHter**™

\* Check with the appliance manufacturer for condensate flowrate or go to our website and use the sizing calculator. As a guideline 20,000,000 BTU/hr at 96% efficiency will produce approximately 8.4 l/min (2.2 gpm) and 60,000,000 BTU/hr at 96% efficiency will produce approximately 25 l/min (6.6 gpm)

**20,000,000 Btu/hr**  
(Upto 8.4l/min or 2.2 gpm/min)

The NT70 “NeutraPro” is ideal for neutralizing large quantities of condensate from condensing boilers and furnace operating on natural gas or propane. The condensate produced by gas fired condensing appliances is acidic and has the potential to harm the environment and the sewer system.

✉ info@axiomind.com

☎ (877)651-1815


🌐 WWW.AXIOMIND.COM

**NeutraPro**™



## NT70 Condensate Neutralizer Tank Technical Information

### DIMENSIONS :

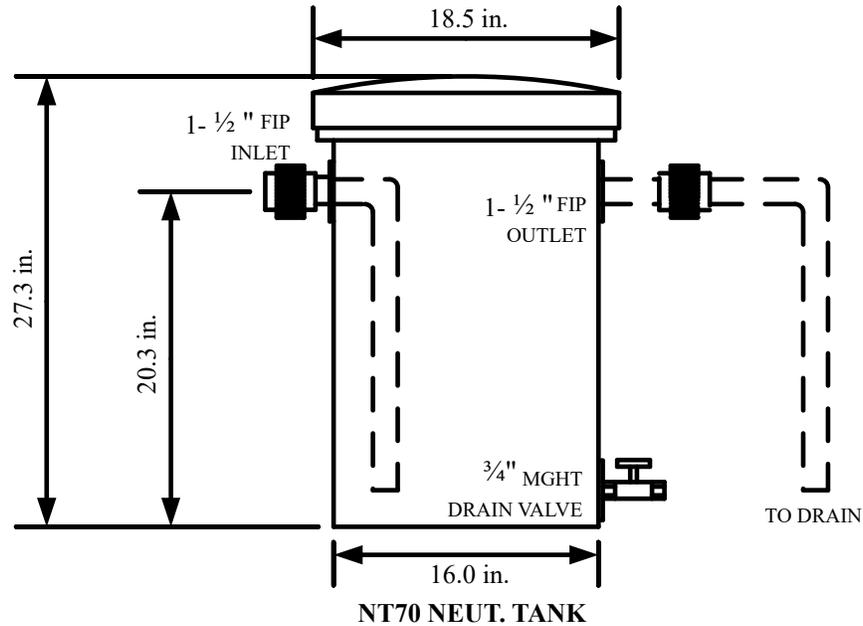

### WEIGHT :

NT70 neutralization tank - 4.5 kg, 10 lbs (empty)  
 82.5 kg, 180 lbs (with media)

Featuring :



### SPECIFICATION :

The NT70 condensate neutralizer tank shall include: 72 litre (19.4 USG) tank and lid made from LLDPE construction with three 1-1/2" FNPT inlet/outlet connections, three 1-1/2" MNPT x 3/4" FNPT PVC reducer bushings, PVC ball valve 3/4" MNPT x 3/4" MGHT, two 3/4" MNPT x 3/4" FNPT PVC unions. Comes with 82.5 kg (180 lbs) of Axiom's LipHter neutralization media. Each tank can neutralize up to 2.2 gpm (8.4 L/min) of condensate. Check with the appliance manufacturer for condensate flowrate. As a guideline 20,000,000 BTU/hr at 96% efficiency will produce approximately 2.2 gpm (8.4 L/min).

### OPTIONAL ACCESSORIES :

**NM15** - Replacement LipHter neutralization media. Five NM15 recharge kits are required to fill the NT70.

### LIMITED WARRANTY :

The NT70 is warranted against defects in materials and workmanship for one year.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent