




NT1-P Condensate Neutralization Tank With Pump Technical Information

DIMENSIONS :

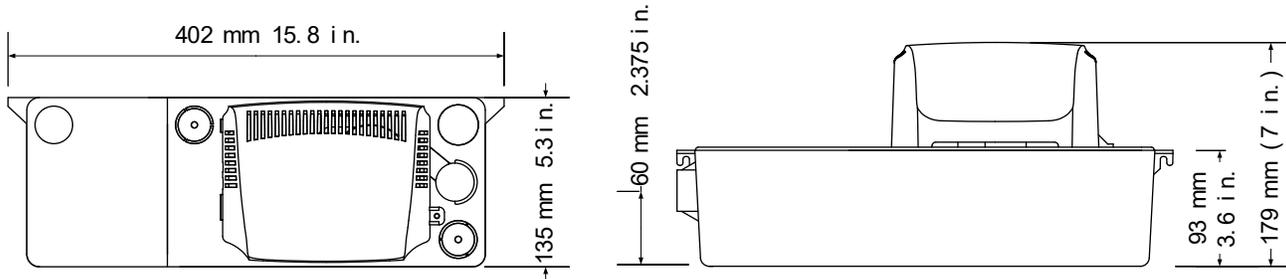

Pump is certified to
CAN/CSA
STD C22.2
No. 108-1

WEIGHT :

3.9 kg, 8.5 lbs. (dry weight with Media)


ELECTRICAL :

Pump: 120VAC 60Hz, 90W, 1.6 Amps
High level safety switch rating: 125 or 250VAC 6A,
125V DC 0.4A, 250V DC 0.3A

PUMP PERFORMANCE :

Submerged pump is self-priming
282 l/hr (74 gph) @ free flow
123 l/hr (32 gph) @ 6 m (20ft)

NT1-P Pump Curve

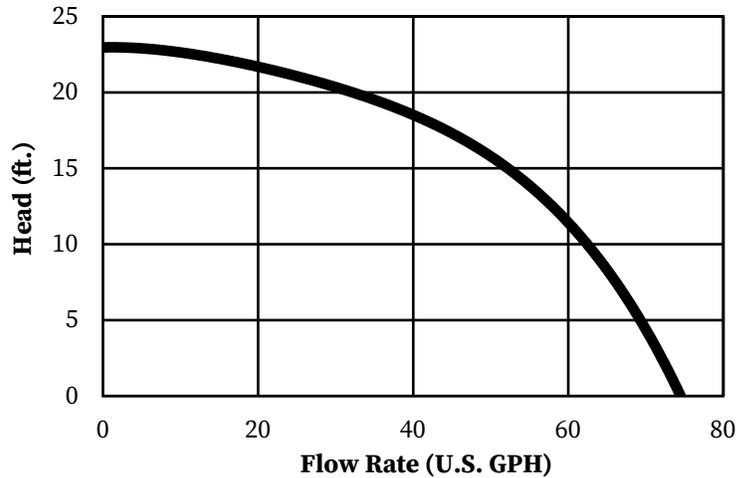

SPECIFICATION :

The condensate neutralization tank with pump shall be AXIOM INDUSTRIES LTD. model NT1-P. System shall include 4 litre (1 U.S. gallon) tank and lid made from SAN, pump with thermal cut-out and electrically; low level float switch; high level float switch for the remote alarm system; check valve; 20 feet of 3/8" vinyl tubing, 3/4" FNPT inlet connection; 6 ft. long power cord. Comes with 1.2 kg (2.7 lbs) of Axiom's LipHter⁺ neutralization media.

OPTIONAL ACCESSORIES :

- NM-1P** -- Replacement LipHter⁺ neutralization media.
- RIA10-1-SAA** -- High level alarm panel provides audible and visual alarm for high level information
- NM-1BULK** -- Replacement LipHter⁺ neutralization media (Up to 10 Refills)

LIMITED WARRANTY :

The "NT1-P" is warranted against defects in materials and workmanship for two years.



Project

Consultant

Unit Tag

Location

Contractor

Sales Agent