



SF100-UHP HYDRONIC SYSTEM FEEDER TECHNICAL INFORMATION

DIMENSIONS :


WEIGHT : 20 kg, 43 lbs (Empty)

PUMP ELECTRICAL :

115/60/1, 1.2 amps
3-prong plug and cord

PUMP PERFORMANCE :

0.09 l/s (1.5 gpm) @ free flow
0.05 l/s (0.85 gpm) @ 585 kPa (100 psig)
Self-priming up to 3.3 m (11 feet)
Maximum liquid temp. 77 C (170 F)

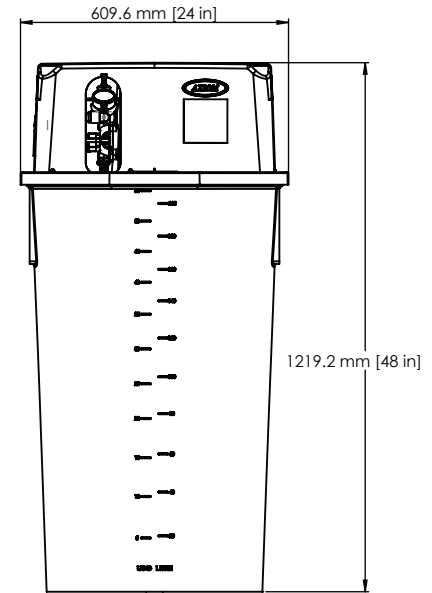

**MIXING & STORAGE TANK
60 USG (227 LITRES)**



Certified to CAN/CSA
C22.2 No. 68

Intertek
9901055

Conforms to
UL 73

SPECIFICATION :

Hydronic system feeder shall be AXIOM INDUSTRIES LTD. Model SF100-UHP. System shall include 227 litre (60 US gallon) storage/mixing tank with cover; pump suction hose with inlet strainer; pressure pump with thermal cut-out; integral pressure switch; integral check valve; cord and plug; pre-charged accumulator tank with Butyl rubber diaphragm; manual diverter valve for purging air and agitating contents of storage tank; pressure regulating valve adjustable (241 – 862 KPa; 35 – 125 psig) complete with pressure gauge; integral replaceable strainer; built-in check valve; union connection; 12 mm (½”) x 900 mm (36”) long flexible connection hose with check valve; low level pump cut-out. Pressure pump shall be capable of running dry without damage. Power supply 115/60/1 1.2 A.

OPTIONAL ACCESSORIES :

- ☐ **2PRV** -- Second Pressure Reducing Valve, Pressure Gauge, System Connector Hose and Check Valve to allow for independent pressure supply to a second system.
- ☐ **RIA10-1-SAA** -- Low level Alarm Panel c/w Remote Monitoring Dry Contacts and Selectable Audible Alarm

LIMITED WARRANTY :

The SF100-UHP is warranted against defects in materials and workmanship for one year.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent