


Condensate Pump



AP23-S

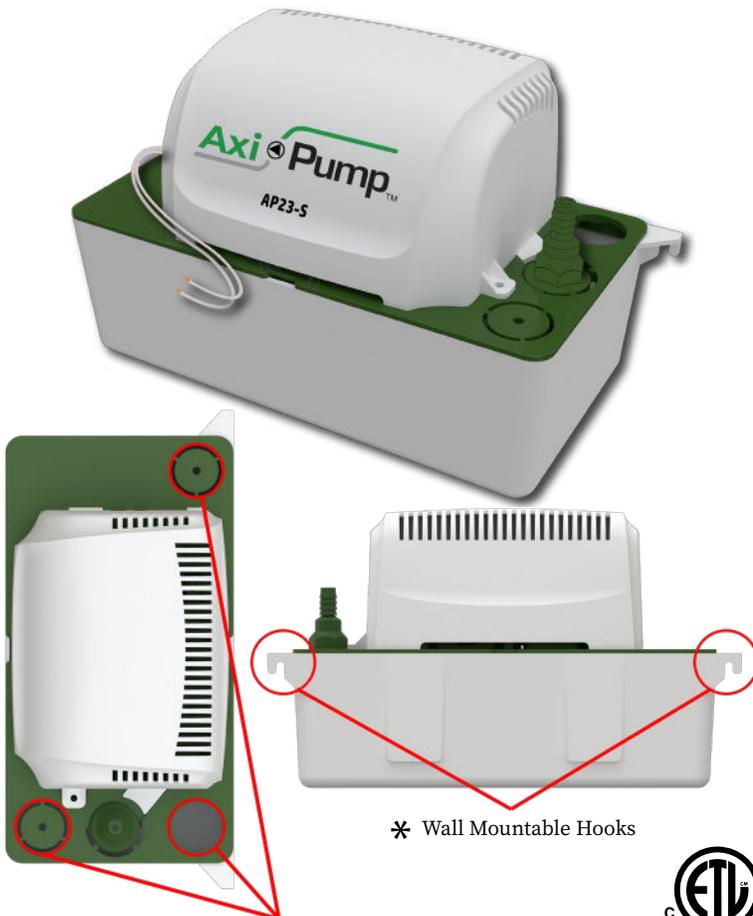

* Multiple Inlet Connections

* Wall Mountable Hooks





▶ 23' Lift

- ▶ Built-In Wall Mount Tabs
- ▶ Three Inlet Holes
- ▶ Quiet Pump Operation
- ▶ Low Power Consumption
- ▶ Thermal Safety Switch
- ▶ Removable Check Valve
- ▶ 3/8" Outlet Connection
- ▶ Corrosion Resistant Material
- ▶ Stainless Steel Pump Shaft
- ▶ 6' Power Cord with Ground
- ▶ High Level Safety Switch
- ▶ Suitable for All HVAC Equipment



AP23-S Condensate Pump Technical Information

DIMENSIONS :

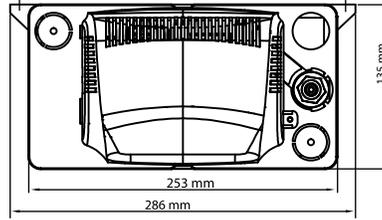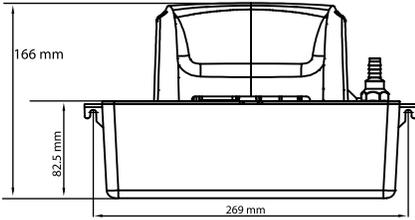

Pump is certified to
CAN/CSA STD
C22.2 no. 108

4007096
Pump conforms to
ANSI/UL STD 778



WEIGHT :

1.93 kg, 4.25 lbs (empty)


ELECTRICAL :

Pump: 120VAC 60Hz, 78.4W,
1.38 Amps High level safety
switch rating: 125 or 250VAC
6A, 125V DC 0.4A, 250V DC 0.3A

PUMP PERFORMANCE :

Submerged pump is self-priming
282 L/hr (74 gph) @ free flow
123 L/hr (32 gph) @ 7 m (23ft)

AP23-S Pump Curve

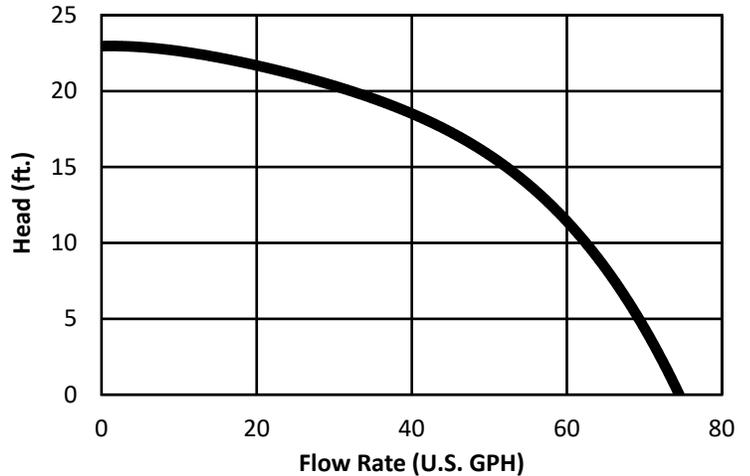

SPECIFICATION :

The Condensate pump shall be AXIOM INDUSTRIES LTD. Model AP23-S. System shall include 1.8 Liter (0.5 U.S. gallon) tank made and lid made from ABS, pump with thermal cut-out and electrically certified to CAN/CSA STD C22.2 no. 108 conforms to ANSI/UL STD 778; low level float switch; high level float switch with N.C. or N.O. Contacts (factory set to N.C.) for remote alarm system; check valve; 6 ft. long power cord. Power Supply 110/60/1.38A.

ACCESSORIES :

RIA10-1-SAA - High level alarm panel provides audible and visual alarm for high level indication.

LIMITED WARRANTY :

The “**AP23-S**” is warranted against defects in materials and workmanship for two years.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent