



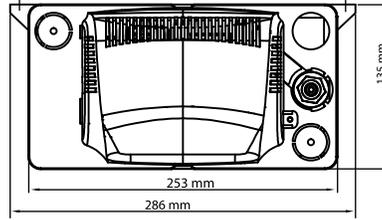

## AP23-S Condensate Pump Technical Information

### DIMENSIONS :

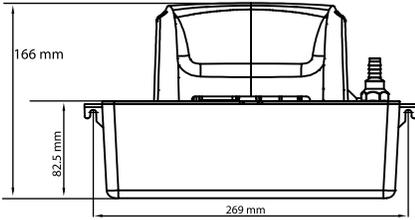

Pump is certified to  
CAN/CSA STD  
C22.2 no. 108

4007096  
Pump conforms to  
ANSI/UL STD 778



### WEIGHT :

1.93 kg, 4.25 lbs (empty)


### ELECTRICAL :

Pump: 120VAC 60Hz, 78.4W,  
1.38 Amps High level safety  
switch rating: 125 or 250VAC  
6A, 125V DC 0.4A, 250V DC 0.3A

### PUMP PERFORMANCE :

Submerged pump is self-priming  
282 L/hr (74 gph) @ free flow  
123 L/hr (32 gph) @ 7 m (23ft)

### AP23-S Pump Curve

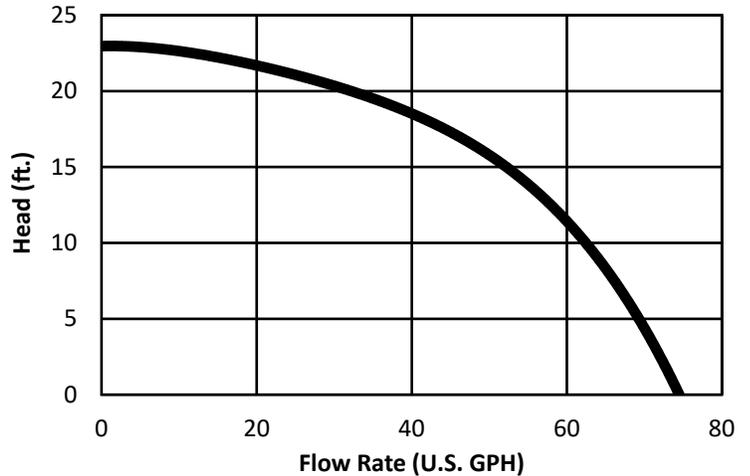

### SPECIFICATION :

The Condensate pump shall be AXIOM INDUSTRIES LTD. Model AP23-S. System shall include 1.8 Liter (0.5 U.S. gallon) tank made and lid made from ABS, pump with thermal cut-out and electrically certified to CAN/CSA STD C22.2 no. 108 conforms to ANSI/UL STD 778; low level float switch; high level float switch with N.C. or N.O. Contacts (factory set to N.C.) for remote alarm system; check valve; 6 ft. long power cord. Power Supply 110/60/1.38A.

### ACCESSORIES :

**RIA10-1-SAA** - High level alarm panel provides audible and visual alarm for high level indication.

### LIMITED WARRANTY :

The “**AP23-S**” is warranted against defects in materials and workmanship for two years.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent