




APm-33DV Mini-Split Condensate Pump Technical Information

DIMENSIONS:

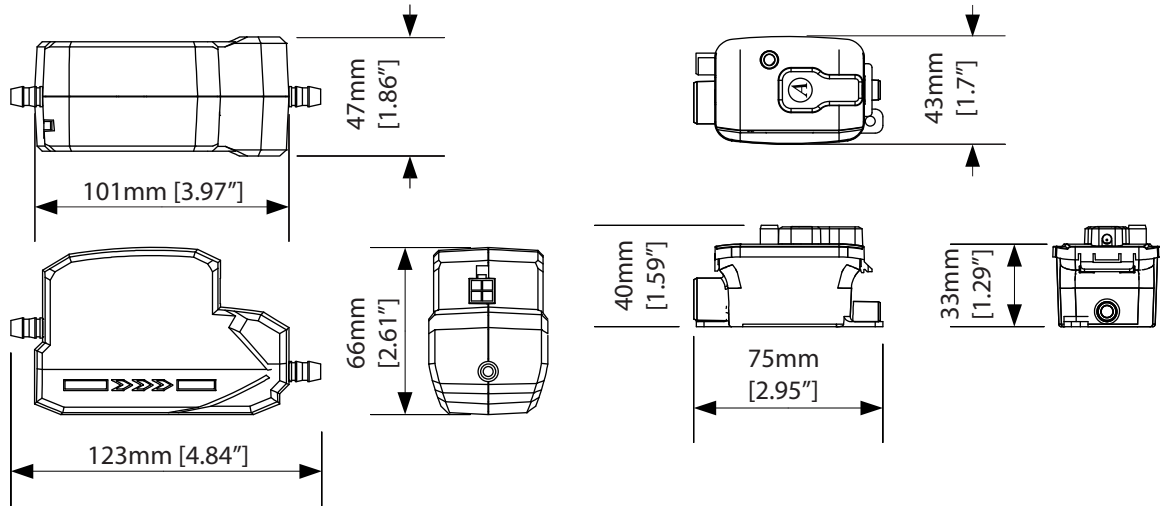

WEIGHT:

1 lbs (empty)

ELECTRICAL:

100-240VAC, 60Hz, single phase
Rated Power: 0.03A. 2.5W
3 Amp. max. high level safety switch


PUMP PERFORMANCE:

Submerged pump is self-priming
Standard head: 10m (33ft)



4007096

CONFORMS TO UL STD. 778
CERTIFIED TO CSA STD. C22.2 NO. 108

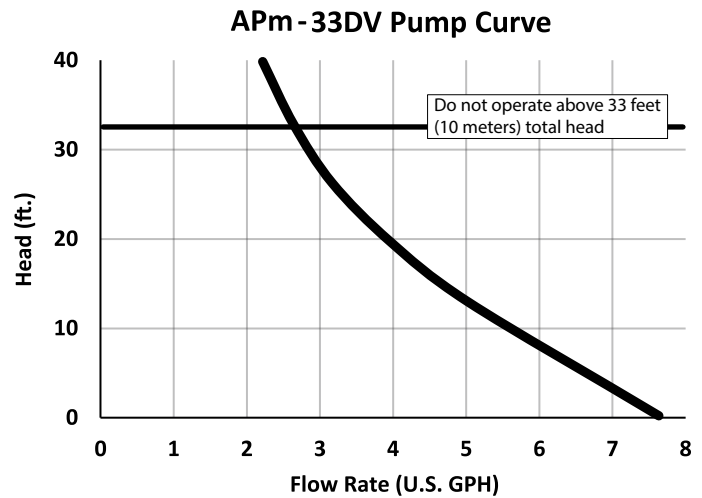

SPECIFICATION:

The mini-split condensate pump shall be AXIOM INDUSTRIES LTD. model APm-33DV. System shall include 35 mL (1 oz) reservoir made from transparent PC (Polycarbonate); pump made of ABS; 6mm I.D. x 9mm O.D. x 1.5m (4.9 ft.) long pump-reservoir connection hose; 12mm I.D. x 21mm O.D. x 40mm (1.5") long inlet hose; 6mm I.D. x 9mm O.D. x 100mm (3.9") long breather hose; 1/2" inlet hose barb adapter; stainless steel serviceable filter; 4 cable ties; 4 double-sided adhesive pads. 3 Amp. maximum high level safety switch; high level alarm cable, high level float cable between reservoir and pump, and power cord all 1.5m (4.9ft.) in length.

LIMITED WARRANTY:

The "APm-33DV" is warranted against defects in materials and workmanship for two years.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent