

SYSTEM FEEDER



RIA10-1-SAA



- ✓ Provides Audible & Visual LED notification of a low-level condition inside system feeder
- ✓ On low-level condition the power supply used for the system feeder power will be disabled
- ✓ Easily test the panel operation at the push of a button
- ✓ Audible Alarm can be silenced
- ✓ Includes a set of dry contacts for third-party notification
- ✓ All units plug into any standard 115 VAC outlet
- ✓ Panel is UL listed

Alarm Panel

On a low-level condition the RIA10-1-SAA Alarm Panel will be disable the system feeder, audible alarm will sound and a set of dry contacts will close for remote indication to a DCS.

✉ info@axiomind.com

☎ (877)651-1815

🌐 WWW.AXIOMIND.COM

PressurePal





RIA10-1-SAA ALARM PANEL TECHNICAL INFORMATION

DIMENSIONS :

WEIGHT : 1.81 kg, 4 lbs

PANEL ELECTRICAL :

115/60/1, 0.7 amps
3-prong plug and cord

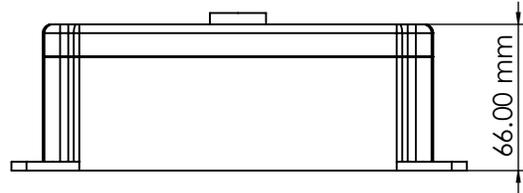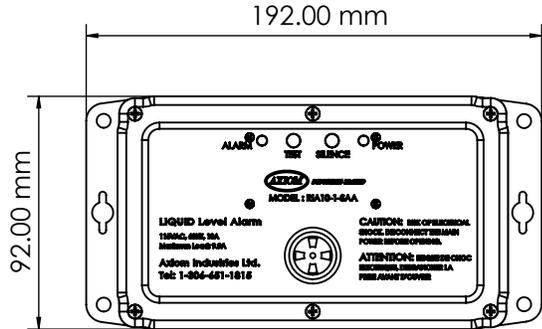

Certified to CSA
C22.2 No. 61010-1-12

Intertek
5020731

Conforms to
UL STD 61010-1

SPECIFICATION :

Alarm panel shall incorporate a power supply cord, pump/alarm relay, power on and alarm indicating lights, alarm buzzer, test switch, silence/off switch, and receptacle for SF100 power supply cord. On low-level condition the SF100 will be disabled, the alarm will sound and a set of dry contacts will open/close.

LIMITED WARRANTY :

The RIA10-1-SAA is warranted against defects in materials and workmanship for one year.

Project

Location

Consultant

Contractor

Unit Tag

Sales Agent