

SYSTEM FEEDER



SF100-UHP



- Adjustable pressure set point between 35-125 psi
- 60 USG reservoir tank stores (227) liter of fluid
- No direct connection to potable water supply eliminates need for backflow prevention
- Feeders are compatible with both water and glycol/water solutions
- Translucent reservoir provides notice that system may have developed a leak and mitigates potential for flooding disaster.
- Diverter valve allows easy purging of air on initial start-up and manual mixing of fluid in the tank
- Fluid drained for service from the system can easily be recovered to the tank
- Fluid level switch shuts pump off if the storage tank level gets too low
- All units plug into any standard 115 VAC outlet

35-125 Psi
(60 USG)



Certified to CAN/CSA
C22.2 No. 68

Intertek
9901055

Conforms to
UL 73

Axiom System Feeders are designed to simplify the process of maintaining the cold static fluid pressure in closed-loop heating and cooling systems. Having a reservoir of suitable make-up fluid eliminates the need for backflow prevention and helps solve many of the associated problems when using domestic water as a make-up fluid.

✉ info@axiomind.com

☎ (877)651-1815

🌐 WWW.AXIOMIND.COM

PressurePal



SF100-UHP HYDRONIC SYSTEM FEEDER TECHNICAL INFORMATION

DIMENSIONS :


WEIGHT : 20 kg, 43 lbs (Empty)

PUMP ELECTRICAL :

115/60/1, 1.2 amps
3-prong plug and cord

PUMP PERFORMANCE :

0.09 l/s (1.5 gpm) @ free flow
0.05 l/s (0.85 gpm) @ 585 kPa (100 psig)
Self-priming up to 3.3 m (11 feet)
Maximum liquid temp. 77 C (170 F)

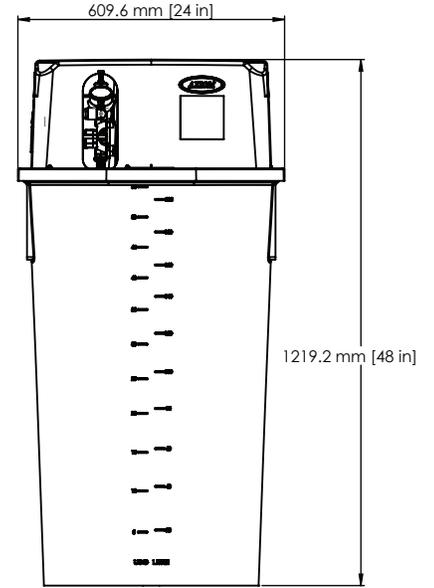

**MIXING & STORAGE TANK
60 USG (227 LITRES)**



Certified to CAN/CSA
C22.2 No. 68

Intertek
9901055

Conforms to
UL 73

SPECIFICATION :

Hydronic system feeder shall be AXIOM INDUSTRIES LTD. Model SF100-UHP. System shall include 227 litre (60 US gallon) storage/mixing tank with cover; pump suction hose with inlet strainer; pressure pump with thermal cut-out; integral pressure switch; integral check valve; cord and plug; pre-charged accumulator tank with Butyl rubber diaphragm; manual diverter valve for purging air and agitating contents of storage tank; pressure regulating valve adjustable (241 – 862 KPa; 35 – 125 psig) complete with pressure gauge; integral replaceable strainer; built-in check valve; union connection; 12 mm (1/2”) x 900 mm (36”) long flexible connection hose with check valve; low level pump cut-out. Pressure pump shall be capable of running dry without damage. Power supply 115/60/1 1.2 A.

OPTIONAL ACCESSORIES :

- 2PRV** -- Second Pressure Reducing Valve, Pressure Gauge, System Connector Hose and Check Valve to allow for independent pressure supply to a second system.
- RIA10-1-SAA** -- Low level Alarm Panel c/w Remote Monitoring Dry Contacts and Selectable Audible Alarm

LIMITED WARRANTY :

The SF100-UHP is warranted against defects in materials and workmanship for one year.

Project	<input type="text"/>	Location	<input type="text"/>
Consultant	<input type="text"/>	Contractor	<input type="text"/>
Unit Tag	<input type="text"/>	Sales Agent	<input type="text"/>