

# Condensate Pump



## AP43-HTS

Axi-Pump Condensate Pumps automatically remove the condensate fluid produced from HVAC appliances like air conditioners, dehumidifier, including harsh acidic water generated from High-efficiency furnaces, boilers, and tankless water heaters.



▶ 43' Lift

- ▶ Rated for High Temperature\*
- ▶ Two Inlet Holes
- ▶ Quiet Pump Operation
- ▶ Low Power Consumption
- ▶ Thermal Safety Switch
- ▶ Removable Check Valve
- ▶ 3/8" Outlet Connection
- ▶ Corrosion Resistant Material
- ▶ Stainless Steel Pump Shaft
- ▶ 6' Power Cord with Ground
- ▶ High Level Safety Switch
- ▶ Suitable for All HVAC Equipment

\* Suitable for condensate up to 185 °F.

✉ info@axiomind.com

☎ (877)651-1815


🌐 WWW.AXIOMIND.COM

**Axi** Pump



# AP43-HTS Condensate Pump Technical Information

## DIMENSIONS :

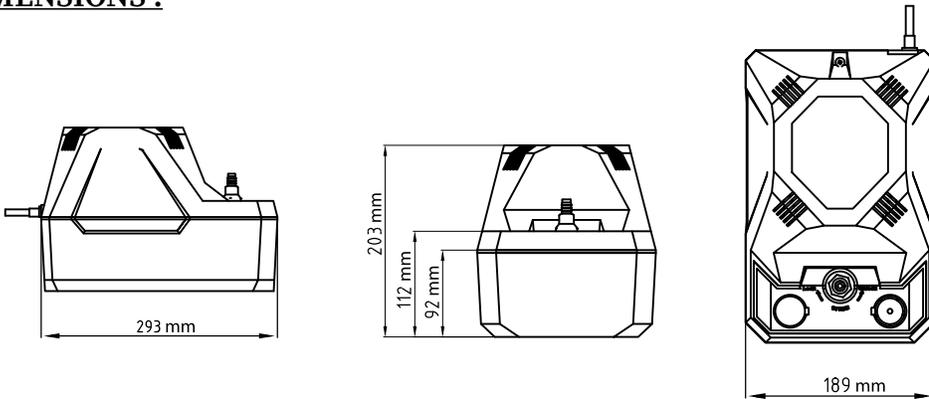

Pump is certified to  
CAN/CSA STD  
C22.2 no. 108

4007096  
Pump conforms to  
ANSI/UL STD 778

**TANK :** 3.8 Litre

## WEIGHT :


3.13 kg, 6.90 lbs (empty)  
6.6 kg, 14.6 lbs (full)

## ELECTRICAL :

Pump: 120 VAC 60Hz, 226W, 1.91 Amps  
High level safety switch rating : 125 or  
250VAC 6A, 125V DC 0.4A, 250V DC 0.3A

## PUMP PERFORMANCE :

Submerged pump is self-priming  
630 l/hr (166 gph) @ free flow  
180 l/hr (48 gph) @ 10 m (33 ft)

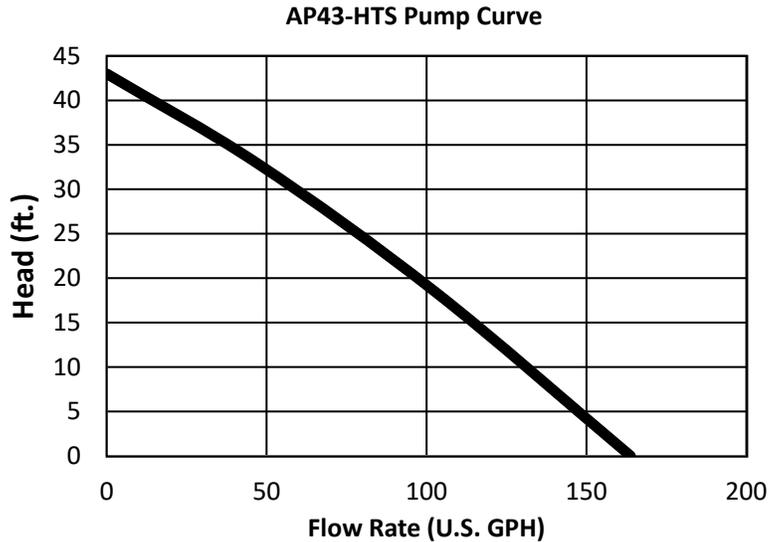

## SPECIFICATIONS :

The condensate pump shall be AXIOM INDUSTRIES LTD. Model AP43-HTS. System shall include 3.5 litre (0.9 U.S. gallon) tank made and lid made from ABS, pump with thermal cut-out and electrically certified to CAN/CSA STD C22.2 no. 108 conforms to ANSI/UL STD 778; low level float switch; high level float switch with N.C. or N.O. contacts (factory set to N.C.) for remote alarm system; check valve; 6 ft. long power cord. Power supply 120/60/1.91A.

## LIMITED WARRANTY :

The “ **AP43-HTS** ” is warranted against defects in materials and workmanship for two years.

**Project**

**Location**

**Consultant**

**Contractor**

**Unit Tag**

**Sales Agent**